



FOR BASIC ESD MATERIALS AND MORE



ESD WORK WEAR CATALOGUE



The Next Generation of ESD Clothing

Step into a new era of protection, comfort, and style with AWP, the brand redefining what professional ESD workwear can be. Designed for environments where precision matters, StaticTec offers a complete collection of high-quality garments including lab coats, T-shirts, polo shirts, sweaters, vests, and more; All engineered to control static and made to last.

Available in a wide range of modern, professional colours, our clothing is crafted to support both safety and team identity. Whether you're outfitting a warehouse, production line, or technical workspace, AWP delivers the perfect balance of durability, performance, and comfort.

Ready to order? Check our webshop anytime to view live stock availability and explore the full AWP collection.

96% Cotton, 4% conductive fibers

Weight: 150 g/m2

Wrinkle-free treatment


U-shaped neck

ESD symbol on left arm

Female sizes: XS - XL (others on request)

Custom logos and staff names on request

Size	Light Blue	Black	Pink
XS	APTSTC22122221	APTSTC22130301	APTSTC22160601
S	APTSTC22122222	APTSTC22130302	APTSTC22160602
M	APTSTC22122223	APTSTC22130303	APTSTC22160603
L	APTSTC22122224	APTSTC22130304	APTSTC22160604
XL	APTSTC22122225	APTSTC22130305	APTSTC22160605

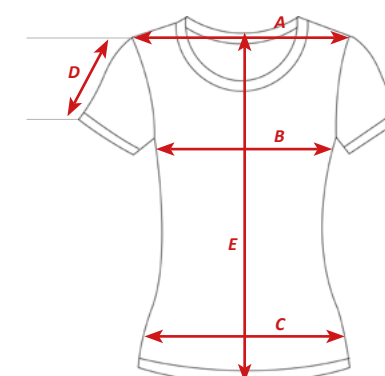

Resistivity point-point (Rp): $10^6 - 10^7$ Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
XS	34	42	42	19	62
S	37	45	45	19	63
M	39	48	48	19	64
L	41	51	51	20	65
XL	44	54	54	21	66

The electrical properties are retained, even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maximum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softeners

You can have your own company logo on the clothing of your choice, embroidered or printed, in the colors of your choice.

Send us your logo image file in .AI or .EPS, so that we can prepare a sample for your approval, before final manufacture.

your own company logo?

ESD T-shirts



96% Cotton, 4% conductive fibers

Weight: 150 g/m2

Wrinkle-free treatment


Round collar

ESD symbol on left arm

Unisex sizes: S - 3 XL (others on request)

Custom logos and staff names on request

Size	Grey	Navy Blue	Black	Royal Blue
S	APTSTC20110102	APTSTC20125252	APTSTC20130302	APTSTC20120202
M	APTSTC20110103	APTSTC20125253	APTSTC20130303	APTSTC20120203
L	APTSTC20110104	APTSTC20125254	APTSTC20130304	APTSTC20120204
XL	APTSTC20110105	APTSTC20125255	APTSTC20130305	APTSTC20120205
2XL	APTSTC20110106	APTSTC20125256	APTSTC20130306	APTSTC20120206
3XL	APTSTC20110107	APTSTC20125257	APTSTC20130307	APTSTC20120207

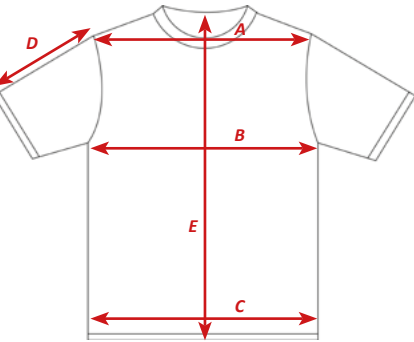

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
S	44	47	47	20	67
M	46	50	50	21	69
L	48	53	53	21	71
XL	51	56	56	21	73
2XL	53	59	59	21	75
3XL	55	62	62	21	76

The electrical properties are retained,
even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



ESD Polo Shirts



48% Polyester, 48% cotton and 4% conductive fiber

Weight: 180g/m2

Wrinkle-free treatment


Hidden fastening on the collar with metal
snap-fasteners

ESD symbol on left arm

Unisex sizes: S - 3XL (others on request)

Custom logos and staff names on request

Size	Black	Grey	Navy Blue	Royal Blue
S	APTSTC30130302	APTSTC30110102	APTSTC30125252	APTSTC30120202
M	APTSTC30130303	APTSTC30110103	APTSTC30125253	APTSTC30120203
L	APTSTC30130304	APTSTC30110104	APTSTC30125254	APTSTC30120204
XL	APTSTC30130305	APTSTC30110105	APTSTC30125255	APTSTC30120205
2XL	APTSTC30130306	APTSTC30110106	APTSTC30125256	APTSTC30120206
3XL	APTSTC30130307	APTSTC30110107	APTSTC30125257	APTSTC30120207

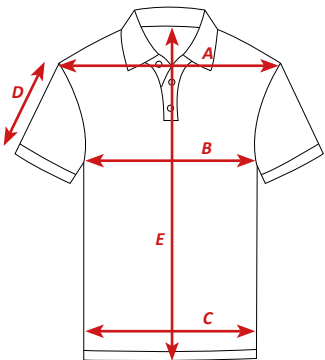

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
S	44	53	53	21	67
M	45	56	56	21	69
L	49	59	59	22	71
XL	51	62	62	22	73
2XL	52	65	65	23	75
3XL	58	68	68	23	77

The electrical properties are retained,
even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners




ESD Lab Coats 1/2 Length

ESD Lab Coats 3/4 Length



64% polyester, 32% cotton and 4% conductive fiber
Weight: 135g/m2
Static dissipative carbon loaded yarn in 4mm grid
Hidden fastening with metal snap-fasteners on front and cuffs
ESD symbol on left chest pocket
Unisex sizes: XS - 3XL (others on request)
Custom logos and staff names on request

Size	Black	White	Grey	Light Blue
XS	APTSTC11230301	APTSTC11240401	APTSTC11210101	APTSTC11222221
S	APTSTC11230302	APTSTC11240402	APTSTC11210102	APTSTC11222222
M	APTSTC11230303	APTSTC11240403	APTSTC11210103	APTSTC11222223
L	APTSTC11230304	APTSTC11240404	APTSTC11210104	APTSTC11222224
XL	APTSTC11230305	APTSTC11240405	APTSTC11210105	APTSTC11222225
2XL	APTSTC11230306	APTSTC11240406	APTSTC11210106	APTSTC11222226
3XL	APTSTC11230307	APTSTC11240407	APTSTC11210107	APTSTC11222227

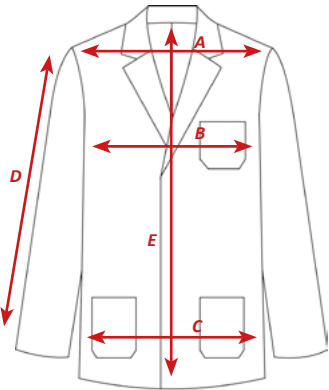

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
XS	48	54	56	54	80
S	50	56	58	57	82
M	52	58	60	59	84
L	54	60	62	61	86
XL	56	62	64	63	88
2XL	58	64	66	65	90
3XL	60	66	68	67	92


The electrical properties are retained, even after 50 industrial washes.

- Wash at maximum 60°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



64% polyester, 32% cotton and 4% conductive fiber
Weight: 135g/m2
Static dissipative carbon loaded yarn in 4mm grid
Hidden fastening with metal snap-fasteners on front and cuffs
ESD symbol on left chest pocket
Unisex sizes: XS - 3XL (others on request)
Custom logos and staff names on request

Size	Light Blue	White	Grey	Black
XS	APTSTC12222221	APTSTC12240401	APTSTC12210101	APTSTC12230301
S	APTSTC12222222	APTSTC12240402	APTSTC12210102	APTSTC12230302
M	APTSTC12222223	APTSTC12240403	APTSTC12210103	APTSTC12230303
L	APTSTC12222224	APTSTC12240404	APTSTC12210104	APTSTC12230304
XL	APTSTC12222225	APTSTC12240405	APTSTC12210105	APTSTC12230305
2XL	APTSTC12222226	APTSTC12240406	APTSTC12210106	APTSTC12230306
3XL	APTSTC12222227	APTSTC12240407	APTSTC12210107	APTSTC12230307

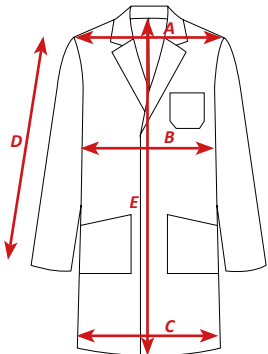

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
XS	47	53	53	52	100
S	48	55	55	53	102
M	50	57	57	57	104
L	52	58	60	59	106
XL	54	60	61	61	107
2XL	56	63	63	63	108
3XL	58	64	65	65	110

The electrical properties are retained, even after 50 industrial washes.

- Wash at maximum 60°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



ESD Sweaters



45% Polyester; 45% cotton, 10% conductive fibers

Weight: 300 g/m2

Wrinkle-free treatment


Long sleeves with ESD elastic cuffs and round neck

ESD symbol on left arm

Unisex sizes: S -3XL (others on request)

Custom logos and staff names on request

Size	Black	Grey
S	APTSTC40230302	APTSTC40210102
M	APTSTC40230303	APTSTC40210103
L	APTSTC40230304	APTSTC40210104
XL	APTSTC40230305	APTSTC40210105
2XL	APTSTC40230306	APTSTC40210106
3XL	APTSTC40230307	APTSTC40210107

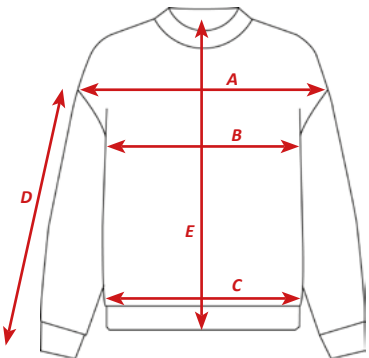

Resistivity point-point (Rp): 10⁶- 10⁷Ohms

Decay time: < 2 seconds

Conforms to current ESD Standards;

IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
S	47	49	49	59	64
M	48	52	52	60	65
L	50	54	54	61	67
XL	51	57	57	62	68
2XL	53	59	59	63	70
3XL	54	62	62	64	71

The electrical properties are retained, even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



ESD Tec-Fabric Vests



75% Rayon/cotton; 15% polyester

6% spandex, 4% conductive fibers

Weight: 400 g/m2

Wrinkle-free treatment


Closure and 2-side pockets with zipper

ESD-sign at left front side

Unisex sizes: S -3XL (others on request)

Custom logos and staff names on request

Size	Navy Blue	Black
S	APTSTC50225252	APTSTC50230302
M	APTSTC50225253	APTSTC50230303
L	APTSTC50225254	APTSTC50230304
XL	APTSTC50225255	APTSTC50230305
2XL	APTSTC50225256	APTSTC50230306
3XL	APTSTC50225257	APTSTC50230307

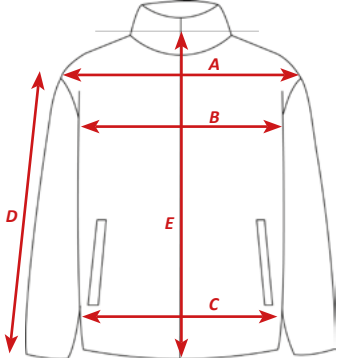

Resistivity point-point (Rp): 10⁶- 10⁷Ohms

Decay time: < 2 seconds

Conforms to current ESD Standards;

IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
S	48	52	52	63	68
M	50	55	55	64	70
L	51	57	57	65	71
XL	53	59	59	66	73
2XL	54	63	63	67	74
3XL	56	67	67	68	76

The electrical properties are retained, even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



ESD Fleece Jackets

ESD High Visibility Vests



88% Polyester and 12% conductive fiber

Weight: 300g/m2


Closure and 2-side pockets with zipper

ESD-sign at left front side

Unisex sizes: S - 3XL (others on request)

Custom logos and staff names on request

Size	Navy Blue	Grey
S	APTSTC60225252	APTSTC60210102
M	APTSTC60225253	APTSTC60210103
L	APTSTC60225254	APTSTC60210104
XL	APTSTC60225255	APTSTC60210105
2XL	APTSTC60225256	APTSTC60210106
3XL	APTSTC60225257	APTSTC60210107

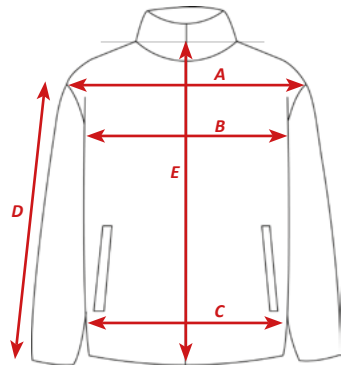

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C	D	E
S	48	52	52	63	68
M	50	55	55	64	70
L	51	57	57	65	71
XL	53	59	59	66	73
2XL	54	63	63	67	74
3XL	56	67	67	68	76

The electrical properties are retained,
even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



98% Polyester and 2% carbon coated yan

Weight: 120 g/m2

Static dissipative vest for use in ESD protected areas


Lightweight breathable and comfortable flt

Closes with 2 velcro fastening strips

2 „all around” reflector strips

ESD-sign at left front side

Size	Yellow
M	APTSTC80070701
	* fits XS to L
2XL	APTSTC80070702
	* fits XL to 3XL

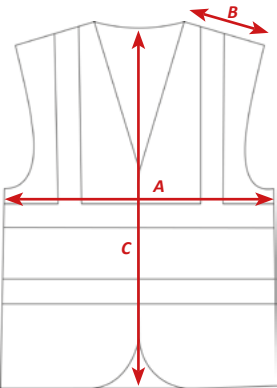

Resistivity point-point (Rp): 10⁶- 10⁷Ohms
Decay time: < 2 seconds
Conforms to current ESD Standards;
IEC61340-5-1 & ANSI/ESD S20.20

Size	A	B	C
M	62	14	64
2XL	68	16	70

The electrical properties are retained,
even after 50 industrial washes.

- Wash at maximum 40°C
- Ironing at maimum 110°C
- Do not bleach
- Do not dry clean
- Do not tumble dry
- Do not use fabric softners



